

## ADSORPTION KINETICS AT DIFFERENT CONCENTRATIONS OF Cu (II) ONTO LOCAL MARL

El Atra BOUZEGHAIA<sup>1</sup>, Said HAFSI<sup>2</sup>

<sup>1</sup> Laboratory of Applied Chemistry and Materials Technology, University Larbi Ben Mhidi, Bp1022  
Oum El Bouaghi, 04000, Algeria, bouzeghaia\_atra@yahoo.com

<sup>2</sup> Laboratory of Applied Chemistry and Materials Technology, University Larbi Ben Mhidi, Oum El  
Bouaghi, 04000, Algeria, hafsi\_said@yahoo.fr

### ABSTRACT

Copper is known to be commonly used heavy metals. This metal, which find many useful applications in our life, are very harmful if they are discharged into natural water resources and many pose finally a serious health hazard. Therefore it is necessary to treat copper containing wastewater before discharging in to water streams. In this work ;kinetic investigations were carried out to evaluate the applicability of used marl found in located in Oum-El-Bouaghi region (Algeria) as a low-cost adsorbent to the removal of copper ions from aqueous solutions. Marl was characterized with FTIR and SEM. The effects of initial concentration and temperature on adsorption of Cu(II) were investigated.,also Kinetic aspects of sorption of Cu(II)on marl has been studied through batch sorption experiments and test of experimental data with pseudo-first and -second order rate models.

**Key Words:** *Adsorption, Copper, Kinetic, Marl, Characterization.*

---

### NOMENCLATURE

#### Symbols :

V	solution volume, L
m	marl mass, g
t	contact time, min
T	température absolue, K
k	rate constant
q	amount of Cu <sup>2+</sup> adsorbed
Δq	relative error

#### Greek Letters:

λ wavelength, nm

#### Indices / Exponents:

i	initial
1	pseudo-first-order
2	pseudo-second-order
e	equilibrium

---

### 1. INTRODUCTION

Environmental pollution and its abatement have drawn keen attention for a long time. The problem of removing pollutants from water and waste water has grown with rapid industrialization. Heavy metals, dyes, oil and other salts, which are toxic to many living life and organisms, are present in the waste water streams of many industrial processes, such as dyeing, printing, mining and metallurgical engineering, electroplating, nuclear power operations, aerospace, battery manufacturing processes, etc. The presence toxic heavy metals has been responsible for several health problems with animals, plants, and human beings. Numerous metals such as Sb, Cr, Cd, Zn, Ni, Cu, Pb, Hg, etc. have toxic effects on human and environment. Since copper is a widely used material, there are many actual or potential sources of copper pollution[1]. Copper may be found as a contaminant in

food, especially shellfish, liver, mushrooms, nuts, chocolate, etc. Containers involving copper materials may contaminate the products such as food, water or drink. Copper is essential to human life and health however, like all heavy metals, it is also potentially toxic. As an example, continued inhalation of copper-containing spray is linked with an increase in lung cancer among exposed workers[2]. The permissible limit of Cu is 2.5mg/L in water[3]. The adsorption technique has become one of the most preferred methods for the removal of heavy metals due to its high efficiency and low cost. The aim of the present work was therefore to study the removal of copper (II) using marl as an adsorbent. The kinetics of Cu(II) adsorption on marl is discussed through batch experiments under the various conditions: the factors affecting the rate constant and the adsorption capacity were investigated with different kinetic models.

## 2. MATHEMATICAL MODEL/EXPERIMENTAL METHOD

### 2.1. Materials:

Marl was used as an adsorbent for the removal of copper (II) from aqueous solution. It was collected from Oum El Bouaghi mountain, this adsorbent was washed with distilled water, and dried at ambient temperature. After drying it was sieved under 180 mesh size and used as such without prior treatment. The solution of copper (II) was prepared by dissolving a suitable amount of  $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$  ( $M=249,68\text{g/L}$ ) in distilled water.

### 2.2. SEM images:

The microstructure of marl was examined by SEM (30-XL PHILIPS).

### 2.3. Characterization by infrared spectroscopy:

FTIR Analysis in the solid phase was performed using a Fourier transform infrared spectrometer (Jasco 460). Adsorbent powders were blended with IR-grade KBr in an agate mortar and pressed into a tablet. Spectra of the marl before Cu(II) sorption were recorded and measured in the absorbance mode in the range of  $400\text{--}4000\text{ cm}^{-1}$ .

### 2.4. Batch experiments:

Kinetic studies were carried out with a simple batch technique. Experiments were performed in a series of 500 mL conical flasks. Each flask was filled with 25 mL solution of Cu(II) of desired concentration and adjusted to the desired temperature. A known amount of marl was added to each flask and kept in an isothermal shaker, the solution was centrifuged to remove the marl particles and analyzed spectrophotometrically at  $\lambda = 810\text{ nm}$  for the concentration of Cu(II) remaining in the solution. The effect of temperature on the adsorption of Cu(II) at different temperatures (293K, 298K, 303 K), Cu(II) adsorption was also studied in a concentration range of  $1000\text{--}4000\text{ mg/L}$ . The amount of Cu(II) adsorbed was calculated by the above method (Eq. (1)).

$$q_t = (C_i - C_t) \frac{V}{m} \quad (1)$$

## 3. RESULTS

### 3.1. Characterization by infrared spectroscopy:

FTIR Analysis is presented in fig 1. Data shows the peak of  $3631\text{ cm}^{-1}$  for the presence of free (AlOH) and SiOH group stretching vibrations while intermolecular hydrogen bonding seems to be present in the region of  $3419\text{ cm}^{-1}$ . Band at  $1637\text{ cm}^{-1}$  is due to the presence of  $\text{H}_2\text{O}$  bending vibration for interlayer water. Antisymmetric stretching vibration of  $\text{CO}_3^{2-}$  group in calcite is indicated by the peak at  $1437\text{ cm}^{-1}$ . Region of  $1027$  and  $873\text{ cm}^{-1}$  indicates the presence of Si-O and deformation out of the plane of  $\text{CO}_3^{2-}$  group in calcite respectively.

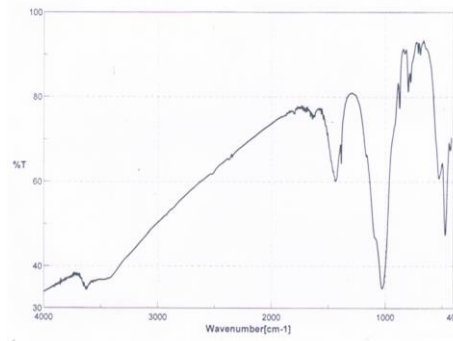


FIGURE 1. The Fourier-transformed infrared spectra of the marl

band observed at  $530\text{ cm}^{-1}$  according to bending vibration of Si-O-M (M means the metals Al, Mg and Fe) the sharp peak of  $472\text{ cm}^{-1}$  corresponding to bending vibration of Si-O-Si [4].

### 3.2. The effect of the initial Cu(II) ions concentration:

The adsorption of Cu(II) onto marl was studied at different Cu(II) ion concentrations in the range from 1000 to 4000 mg/L. Results are presented in Fig 2. The initial concentration provides an important driving force to overcome all mass transfer resistance of Cu(II) ions between the aqueous and solid phases, hence a higher initial concentration of Cu(II) ions may increase the adsorption capacity showed that adsorption of Cu(II) ions increased as a function of increasing Cu(II) concentration [5]. We can indicate that at lower concentrations, all Cu(II) ions present in solution could interact with the binding sites. At higher concentrations, lower adsorption yield is due to the saturation of adsorption sites [6].

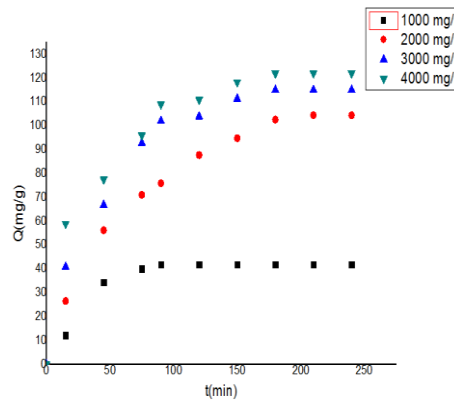


FIGURE 2. Effect of initial concentrations

### 3.3. The effect of the temperature

The effect of temperature on the Cu(II) ions removal was illustrated in Fig 3. The maximal adsorption efficiencies were found at 303K. While the increasing trend of adsorption was observed with increasing temperature from 298 to 303K. The increase in adsorption capacity of marl with temperature indicates an endothermic process, reported that the increase in adsorption with temperature may be attributed to either increase in the number of active surface sites available for adsorption on the adsorbent or the decrease in the thickness of the boundary layer surrounding the adsorbent with temperature [7].

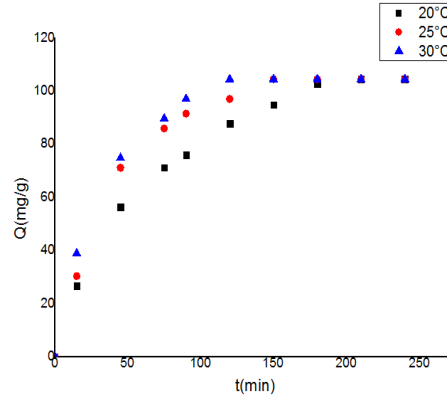


FIGURE 3. Effect of temperature

3.4. Adsorption dynamics:

The rate constant of adsorption is determined from the first order rate expression given by Lagergren :

$$q_t = q_e (1 - \exp(-k_1 t)) \tag{2}$$

Values of  $k_1$  were calculated from the curves of  $q_t$  vs  $t$  (figures not shown) for different temperature and different concentrations of adsorbate, it is more likely to predict the behaviour over whole range of adsorption .The non linear curve of  $q_t$  vs  $t$  show a good agreement of experimental data with the first-order kinetic model for different initial Cu(II) concentrations (Table 1 ). The calculated  $q_e$  values agree very well with the experimental data.The second-order kinetic model is expressed as

$$q_t = \frac{k_2 q_e^2 t}{1 + k_2 q_e t} \tag{3}$$

the experimental  $q_e$  values do not agree with the calculated ones, obtained from the non linear curves (Table 1 ). This shows that the adsorption of copper marl is not a second order reaction . These indicate that the adsorption system belongs to the first order kinetic model . In this study, we based the calculation of  $\Delta q_e(\%)$  and  $V_i$ , expressed as follows:

$$\Delta q(\%) = \frac{|q_{e,exp} - q_{e,cal}|}{q_{e,cal}} \times 100 \tag{4}$$

$$V_i = k_2 (q_e)^2 \tag{5}$$

Parametres	1000 mg/L	2000 mg/L	3000 mg/L	4000 mg/L
Pseudo-first order				
$k_1$	0.02496	0.01506	0.02201	0.0271553
$q_e(\text{exp})$	41.96	104.45	115.06	122
$q_e(\text{cal})$	47.68703	107.3243	115.37231	118.984
$\Delta q(\%)$	14.0227	2.67814	2.7069	2.5347
$R^2$	0.98773	0.99342	0.98985	0.9719
Pseudo-second order				
$k_2$	2.66908E-4	1.03843E-4	1.7776E-4	2.5277E-4
$q_e(\text{cal})$	69.20304	138.99859	139.96229	138.69219
$V_i$	1.2782	2.0063	3.4822	4.8811
$\Delta q(\%)$	39.3668	24.8558	17.7921	12.7564

R <sup>2</sup>	0.95464	0.99812	0.99221	0.98848
----------------	---------	---------	---------	---------

TABLE 1. Kinetic parameters for adsorption of Cu<sup>2+</sup> onto marl with different concentrations

#### 4. CONCLUSIONS

The amount of copper (II) ions adsorbed onto new adsorbent increased with an increase in concentration and temperature. The results indicate an endothermic process and the pseudo-first order rate expression provided the best fit kinetic model for all systems studied. Therefore, this adsorbent, which has a very low economical value, may be used effectively for the adsorption of copper (II) ions from aqueous solutions. The results indicate an endothermic process.

#### REFERENCES

- [1] V.C.Taty-Costodes, H. Fauduet, C. Porte and A. Delacroix, Removal of Cd(II) and Pb(II) ions, from aqueous solutions, by adsorption onto sawdust of *Pinus sylvestris*, *J. Hazard. Mater.*, 105, 121–142, 2003.
- [2] B. Yu, Y. Zhang, A. Shukla, S.S. Shukla and K.L. Dorris, The removal of heavy metal from aqueous solutions by sawdust adsorption - removal of copper, *J. Hazard. Mater.*, B 80, 33–42, 2000.
- [3] M.N.V. Prasad and H. Freitas, Removal of toxic metals from solution by leaf, stem and root phytomass of *Quercus ilex* L. (holly oak), *Environmental Pollution*, 110, 277–283, 2000.
- [4] A.M'leyeh, E. Srasra et A. Cheref, Fixation des métaux lourds par les argiles de la décharge municipale de Borj Chekir (SW de Tunis), *Proceedings of International Symposium on Environmental Pollution Control and Waste Management*, 533-546, 2002.
- [5] J. Hanzlik, J. Jehlicka, O. Sebek, Z. Weishauptova, V. Machovic, Multicomponent adsorption of Ag(I), Cd(II) and Cu(II) by natural carbonaceous materials, *Water Res.*, 38, 2178–2184, 2004.
- [6] D. Ozer, A. Ozer, The adsorption of copper(II) ions on to dehydrated wheat bran (DWB): determination of the equilibrium and thermodynamic parameters, *Process Biochem.* 39, 2183–2191, 2004.
- [7] A.K. Meena, G.K. Mishra, P.K. Rai, C. Rajagopal, P.N. Nagar, Removal of heavy metal ions from aqueous solutions using carbon aerogel as an adsorbent, *J. Hazard. Mater.*, B122, 161–170, 2005.